




RIGID ALUMINUM BACKED SIGNS

Technical Data

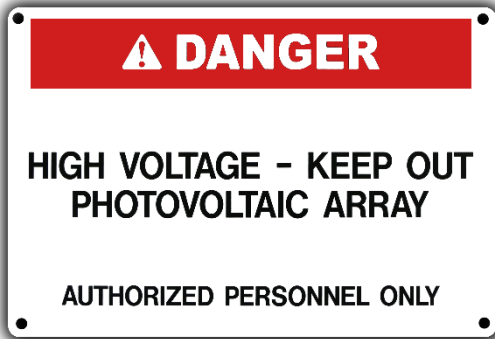

Description

MSI aluminum backed signage consists of a graphics layer bonded to a rigid aluminum backing providing sign strength, rigidity and durability.

The graphics layer is an outdoor durable material, with a 0.001" (.0254mm) UV resistant, over-laminate providing excellent fade resistance and outdoor durability.

Physical and Chemical Characteristics

Sign Base Thickness:	Various available
Graphic Layer:	Various options available
Protective Layer:	MS-1000 .001" thick
Service Temperature:	-40°F through 250°F (-40°C through 121°C)
Water Resistance:	Excellent
UV Resistance:	Excellent
Outdoor Durability:	5 years minimum
Mounting:	Adhesive, holes or grommets

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Revised on 10/31/2019

